

The HVAC mounted MCI™ SynAlRgPure is designed as the first fully customizable probe to provide the power you need for any environment. The probe produces aggressive ionized oxidizers (without producing ozone) and multicluster ions that are then distributed throughout the indoor environment cleaning both the internal HVAC equipment, ductwork and, ultimately the air and surfaces indoors.

This trademarked MCI™ Multi-Cluster Ionization technology uses an enhanced output PCO (UV photo-catalytic oxidation with enhanced quad-metallic coatings) and can be supercharged with the addition of the patented dielectric barrier ionizer to increase its cleaning power to reduce microbials, particulates and VOCs. The synergistic combination of effective components is the key to its operation.

MCI Probe in Supply Plenum MCI Probe in Return Plenum


WARRANTY

Cells are replaced annually but the quad-metallic target plate is warranteed for the life of the probe against manufacturer defects. The ballast carries a 5-year limited warranty.

OZONE Optional

MCI™ Multi-Cluster Ionization technology is so effective that it does not require ozone to reach efficacy. Ozone producing UV lamps are an optional upgrade.






INSTALLATION

A single probe is installed in the return plenum and an additional probe installed in the supply plenum sized to match the HVAC equipment coverage area. This dual installation provides cleaning power to the internal equipment and the downstream duct system reducing microbials and other contaminants. The probe in the return air plenum eliminates the need for germicidal lamps shining on the evaporator coils.

http://www.SynAIRgPure.com



	Application	Recommended	Technology	Shipping Weight	Length
NG CHART	1-3 tons air handler	MCI™ SynAlRgPure16K	Enhanced PCO	2.8lbs 1.27kg	9"
	3-5 tons air handler	MCI™ SynAlRgPure24K	Enhanced PCO w/single DBI cell	3.2lbs 1.45kg	9"
	5-10 tons air handler	MCI™ SynAlRgPure40K	Enhanced PCO w/double DBI cell	3.6lbs 1.63kg	13"
	400cfm-1200cfm airflow	MCI™ SynAlRgPure16K	Enhanced PCO	2.8lbs 1.27kg	9"
	1200cfm-2000cfm airflow	MCI™ SynAlRgPure24K	Enhanced PCO w/single DBI cell	3.2lbs 1.45kg	9"
	2000cfm-4000cfm airflow	MCI™ SynAlRgPure40K	Enhanced PCO w/double DBI cell	3.6lbs 1.63kg	13"
	16,000 cubic feet living space	MCI™ SynAlRgPure16K	Enhanced PCO	2.8lbs 1.27kg	9"
	24,000 cubic feet living space	MCI™ SynAlRgPure24K	Enhanced PCO w/single DBI cell	3.2lbs 1.45kg	9"
	40,000 cubic feet living space	MCI™ SynAlRgPure40K	Enhanced PCO w/double DBI cell	3.6lbs 1.63kg	13"
SIZI	Return plenum	MCI™ SynAlRgPure16K	Enhanced PCO	2.8lbs 1.27kg	9"

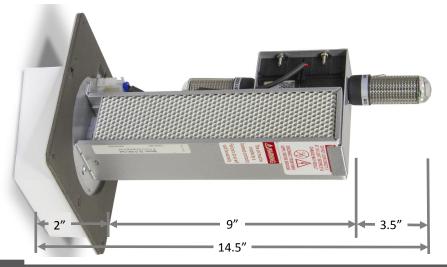



PART	REPLACEMENT CYCLE	PART NUMBER
25,000 hour NO OZONE UV Lamp	Annually	BLS2538569
Dielectric Barrier Ionizer	Annually	BLS255685
Quad-Metallic Target Plate	Lifetime	BLS2569300
12 Volt Inverter Power Cord	Lifetime	BLS85988652
Probe Ballast	5 Year Limited	BLS544658902a